motion and control solutions

NEW 5 POSITION SPOOL SECTION!



- Spring return to neutral plus a detent position on both ports
- Motor and Cylinder spool options
- Marinised option
- Ideal for winch applications precise control when needed plus the option of a detent position

Contact us for details: +44 (0)1626 863634 Sales@hypro.co.uk www.hypro.co.uk


NEW 5 POSITION SPOOL SECTION!

Description

The new 5 position valve section has been designed for use in winch applications and as a multi-function valve.

It has both spring return and detent holding in both spool directions. Thus it can be used for operations requiring either momentary or constant control or both.

When used in conjunction with quick release couplings 1 spool section can be used to control various pieces of equipment.

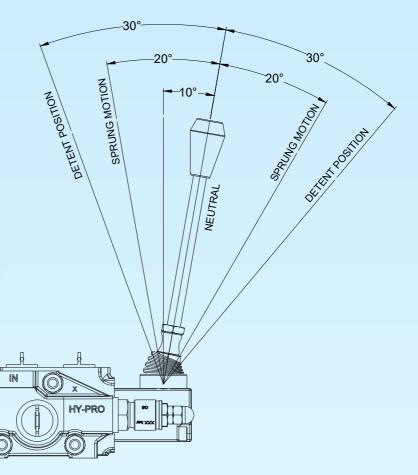

5 Position Spool Section Specification

Performance

Rated flow

ΔP inlet to outlet at 60 l/min

Maximum pressure


Maximum back pressure

Temperature rating: minimum

Temperature rating: maximum

Spool leakage

60 l/min 0.9 bar 250 bar 25 bar -20°c +65°c 8cc/min

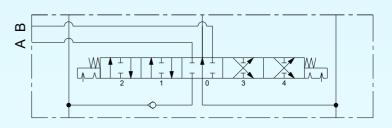

Recommended Oil

Mineral based hydraulic ISO VG37 Filtration minimum 25 micron

Material

Body Cast iron
Seals Nitrile & Viton
Paint HMS1016



Weight 2.0kg Section width 38.1mm

